

PERFORMANCE SPECIFICATIONS

SATELLITE SIGNALS TRACKED SIMULTANEOUSLY

220 Channels
 GPS Simultaneous L1C/A, L2C, L2E, L5
 GLONASS Simultaneous L1C/A, L1P, L2C/A (GLONASS M only), L2P
 Galileo Simultaneous E1 BOC, E5A, E5B, E5AltBOC¹
 BDS B1, B2
 SBAS L1 C/A, L5

555 Channels (Optional)
 GPS L1C/A, L1C, L2C, L2P, L5
 GLONASS L1C/A, L2C, L2P, L3, L5
 BeiDou B1, B2, B3
 Galileo E1, E5A AltBOC, E5a, E5B, E6⁴
 IRNSS L5
 SBAS L1, L5
 QZSS L1C/A, L1C, L2C, L5, L6
 L-band Up to 5 channels
 TerraStar Correction Services⁴

POSITIONING PERFORMANCE²

Hot Start Typically < 10s Cold Start Typically < 15s

High-Precision Static

Horizontal 2.5 mm + 0.1 ppm RMS
 Vertical 3.5 mm + 0.4 ppm RMS

Static and Fast Static

Horizontal 2.5 mm + 0.5 ppm RMS
 Vertical 5mm + 0.5 ppm RMS

Post Processing Kinematic (PPK / Stop & Go) GNSS Surveying

Horizontal 8mm+1ppm RMS
 Vertical 15mm+1ppm RMS
 Initialization time Typically 10 minutes for base while 5 minutes for rover
 Initialization reliability Typically > 99.9%

Real Time Kinematic(RTK) Surveying

Single Baseline

Horizontal 8mm+1ppm RMS
 Vertical 15mm+1ppm RMS

Network RTK

Horizontal 8mm+0.5ppm RMS
 Vertical 15mm+0.5ppm RMS
 Initialization time Typically 2-10s
 Initialization reliability Typically > 99.9%

Code Differential GNSS Positioning

Horizontal 25cm+1ppm RMS
 Vertical 50cm+1ppm RMS
 SBAS³ 0.50m Horizontal, 0.85m Vertical

COMMUNICATION

Network Communication

Fully integrated, fully sealed internal WCDMA, compatible with GPRS, GSM
 Wifi frequency is 2.4G, supports the standard protocol 802.11b/g/n
 Network RTK (via CORS) range 20-50km

Hi-Target Advanced Internal UHF Radio:

Frequency 403-473MHz
 Transmitting power 1W, 2W, 4W adjustable
 Transmitting linkrate 9.6Kbps, 19.2Kbps
 Support multiple protocols
 Working range 3-5km typically, 8-10km optimal

SATEL Internal UHF Radio (Optional)

Frequency 403-473MHz
 Transmitting power 0.1W -1W adjustable
 Transmitting speed 9.6Kbps, 19.2Kbps
 Supports multiple communication protocol
 Working range 3-5km typically, 8-10km optimal

HI-TARGET External UHF Radio

Frequency 460MHz with 116 channels
 Transmitting power 5W, 10W, 20W, 30W adjustable
 Transmitting speed Up to 19.2Kbps
 Working range 8-10km typically, 15-20km optimal

Advanced External UHF Radio (Optional)

Frequency 410-470MHz
 Transmitting power 5W/25W
 Compatible with third party radio
 Working Range 8-10km typically, 15-20km optimal

HARDWARE

Physical

Dimensions (W x H) 153mm x 83mm (6.02inch x 3.27inch)
 Weight 950g (2.09lb) without internal battery
 Operation temperature -40°C ~+75 °C [-40 °F ~+167 °F]
 Storage temperature -55°C ~+85 °C [-67 °F ~+185 °F]
 Humidity 100%, condensing
 Water/dustproof IP67 dustproof, protected from temporary immersion to depth of 1m (3.28ft)
 Shock and vibration Designed to survive a 2m(6.56ft) natural fall onto concrete.

Electrical

Power 6V to 28V DC external power input
 Power consumption ≤ 3.5W
 Automatic switching between internal power and external power
 Rechargeable, removable 7.4V, 5000mAh Lithium-ion battery in internal battery compartment

Internal Battery Life

Static more than 12 hours
 RTK Rover (UHF/GPRS/3G) 10 hours
 RTK base more than 8 hours

I/O Interface

Bluetooth, NFC, standard USB2.0 port, TNC antenna connector
 RS232 serial port, DC power input (5-pin), MicroSD card port

Tilt Survey System

Electronic Bubble

WebUI

SYSTEM CONFIGURATION

System

Data storage 16GB Internal storage+ Internal Micro SD Card memory (Support up to 32GB extension)

Record GNS and Rinex format simultaneously

Data Formats

[1Hz positioning output, up to 50Hz - depends on installed option]
 CMR: sCMRx, CMR, CMR+input and output
 RTCM: RTCM 2.1, 2.2, 2.3, 3.0, 3.1, 3.2 input and output
 Navigation outputs ASCII: NMEA-0183 GSV, AVR, RMC, HDT, VGK, VHD, ROT, GGK, GGA, GSA, ZDA, VTG, GST, PJT, PJK, BPQ, GLL, GRS, GBS
 Navigation outputs binary: GSOF

¹Developed under a License of the European Union and the European Space Agency.

²Precision and reliability may be subject to anomalies due to multipath, obstructions, satellite geometry, EMI and multipath clean environment, optimal GNSS constellation configurations, along with the use of survey practices that are generally accepted for performing the highest-order surveys for the applicable application including occupation times appropriate for baseline length. Baselines longer than 30 km require precise ephemeris and occupations up to 24 hours may be required to achieve the high precision static specification.

³GPS only and depends on SBAS system performance. FAA WAAS accuracy specifications are < 5 m 3DRMS.

⁴Available to subscribe for TerraStar-C, RTK ASSIST, requiring additional service fee.

Descriptions and Specifications are subject to change without notice

V90 PLUS

GNSS RTK SYSTEM



AUTHORIZED DISTRIBUTION PARTNER

22J208

Hi-Target Surveying Instrument Co., Ltd

ADD: Building 13, Tian'An Technology Zone HQ Center, No. 555,
 North of Panyu RD, Panyu District, 511400 Guangzhou, China.

www.hi-target.com.cn +86-20-28688296 info@hi-target.com.cn





V90 PLUS

GNSS RTK SYSTEM


With a hi-tech, fully integrated design, the conveniently sized V90 Plus is one of the most flexible choices for any measuring task. Built-in Linux3.2.0 operating system, pre-loaded multiple smart applications such as tilt surveying, electronic bubble calibration, NFC and voice DIY. The V90 Plus GNSS system provides surveyor industry-leading GNSS operation.

83mm HEIGHT / 153mm DIAMETER / 950g WEIGHT



Multi-constellation Tracking

- 220 tracking channels
- NGS approved full-wave GNSS antenna
- Supports GPS, GLONASS, GALILEO, BDS, SBAS

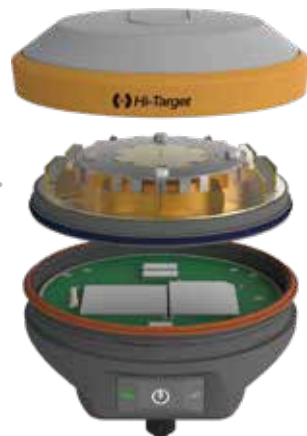

Advanced BD970 OEM is a compact multi-constellation receiver designed to deliver centimeter accuracy to a variety of applications.

- Supports a wide range of satellite signals
- A large receiving area designed for multipath mitigation
- Air dielectric is light and stable



Smart Application

- Offers tilt survey with a maximum tilt angle of 30 degrees
- Supports electronic bubble
- Intelligent voice assistance guides field operations. Voice can be DIY
- Standard Rinex data and HI-TARGET raw data recorded simultaneously

Optional Transceiver UHF Radio

- The transceiver UHF radio enables switchable working modes between base and rover
- Three types of internal UHF radio provide different frequencies based on users requirements. The SATEL internal UHF radio is compatible with other radios

Multi-network Connection

- Supports GPRS, GSM and WCDMA
- Supports WIFI

Powerful Battery

- Powered by high-capacity (5000mAh) Li-ion battery to ensure full day operation

Rugged Design

- IP67 dustproof and waterproof
- Able to survive a 2-meter natural fall onto concrete

iHand55

Professional Field Controller

The iHand55 Handheld Controller is a professional field controller with a big vision. More features of the latest Hi-Survey Road Software contribute to achieving high intelligence. Keeping robust and reliable in fieldwork under any conditions, iHand55 is a perfect choice for your survey work.

KEY FEATURES

- Ergonomically designed, lighter and easy to hold.
- Industrial-grade protection that can withstand tough environments.
- Convenient wireless data transmission via Bluetooth, Wi-Fi and 4G.
- Quick charge, with a large capacity lithium battery to ensure a whole day work.

Hardware Configuration	OS: Android 10 Processor: CPU: 8 core, 2.0GHZ Storage: 2 GB RAM+16 GB ROM; T-Flash memory card, up to 128GB Display: 720*1280, 5.5", bright Outdoor Colorcapacitive touch screen (with touch pen, can be operated with gloves) Input Configuration: Physical full keyboard, number / letter separate, professional custom smart input method
Communication	Cellular mobile: 4G, Dual SIM WiFi: IEEE 802.11 b/g/n, Wapi, AP Bluetooth: Built-in Bluetooth (2.1+4.0) NFC USB: USB, TypeC interface, OTG
Physical	Weight: 480g (within battery) Size: 236 mm*85 mm*25 mm Operating temperature: -20C ~ +60C Storage temperature: -30C ~ +70C Free fall: 1.2 m Shock and vibration: MIL-STD-810H
GNSS Features	GNSS: GNSS antenna, GPS, GLONASS, BDS, AGPS, 20 channels
Power Supply	Battery: 7500mAh internal Duration: 14 hours

Hi-Survey Road

Survey Data Collection Software

The Hi-Survey Road is an android software that is designed for all types of land survey and road engineering projects in the field. It is compatible with Hi-Target professional controllers, android phones, tablets and other third-party android devices. It is a sleek and easy-to-use software that supports the operating of big data with build-in tools. With customized industrial application solutions, more possibilities are created for users.



KEY FEATURES

- Various algorithms to achieve high accuracy in corresponding measuring circumstances with a better reliability.
▶ Tilt survey, quasi-dynamic technology, detail survey, timing static survey, etc.
- Express interacting functions to greatly improve the work efficiency.
▶ Cross-projects points selection, QR code scanning, multi-format support, etc.
- Integrated professional measurement functions for engineering applications.
▶ Road functions, DTM surface operations, Google online base map, 3rd party rangefinders, etc.